

S750FG6

75 cm, FRIDGE, OFR Model

BUILT-IN

INTEGRATED® SERIES

Fhiaba



FEATURES

- Made in Italy
- OptiView™: OptiView LED lights
- EventLift™: Easily rearrange the shelving without removal using the EvenLift system
- ProVent™: Uniform air circulation maintains consistent temperatures throughout the appliance resulting in better food preservation
- Antibacterial Stainless Steel Interiors Drawers: Achieve the highest food quality by storing food in the stainless steel interior drawer that shields against the spread of bacteria
- Total No Frost: Temperature control helping mitigate cooling loss when opening the refrigerator door. No more frost build-up that requires defrosting
- EquiLance™: Achieve a seamless built-in look with Fhiaba's innovative door hinge
- Soft - Close System: State-of-the-art closing system ensures refrigerator crisper drawers close smoothly and quietly

GENERAL PROPERTIES

Equilance Hinge	YES
Soft-Closing Glides	YES
Low Vibration	YES
OptiView (Led Light Spots)	YES
Shelves	4 - 1 fixed 3 adjustable
Type Of Shelves	glass
Door Bins	3
Fridge Interior Drawers	3
Freezer Drawers	N/A
Evenlift Shelves	YES
Full Extension Shelves 90° Door Opening	NO
Full Extension Drawers 90° Door Opening	YES
Defrost Process	AUTOMATIC
Ice Maker With Water Filter	NO
Door Open Alarms	YES
Shopping Fridge	YES
Shopping Freezer	NO
Power Failure Alert	YES
Water Dispenser With Water Filter	NO

S750FG6



75 cm, FRIDGE, OFR Model

BUILT-IN

INTEGRATED® SERIES

PRODUCT DETAIL

Fhiaba

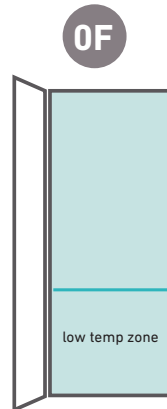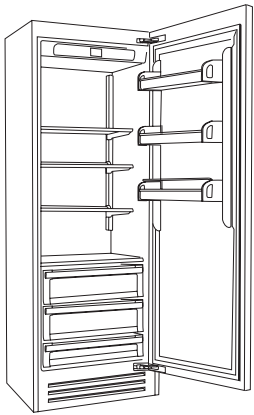

1D | 1M

fridge

D = door

M = separate microclimates

CAPACITY		DIMENSIONS & WEIGHT	
Volume Compartment 1 (L)	479	Height of the product (closed weels)(mm)	2050
Volume Compartment 2 (L)	N/A	Adjustable feet height (mm)	25
Volume Compartment 3 (L)	N/A	Width of the product (mm)	749
Total Net Volume (L)	479	Depth of Product without handle (mm)	610
Total Gross Volume (L)	489	Wall cavity height (mm)	2064
Compartment 1 / Upper wine cellar capacity (bottles)	N/A	Wall cavity width (mm)	750
Compartment 2 / Lower wine cellar capacity (bottles)	N/A	Wall cavity depth (mm)	650
Compartment 3 / Bottom wine cellar capacity (bottles)	N/A	Net Weight (kg)	154
		Gross Weight (kg)	175
TECHNICAL DETAILS		TEMPERATURE RANGES	
Total absorbed current (A)	1.5	Climatic compartments	1
Voltage (V)	220-240V	Compartment 1 / Upper temperature (°C)	from 2 to 8
Frequency (Hz)	50/60 Hz	Compartment 2 / Middle temperature (°C)	from N/A to N/A
Power Cord Length (mm)	2	Low temp zone	YES
Plug Type	Tipo F (Schuko) 16A IEC13 10A	Compartment 3 / Low temperature (°C)	from N/A to N/A
Climatic class	SN/T	Dual zone	NO
Noise level (dB)	41	ACCESSORIES	
Refrigerant (gas)	R600a	<ul style="list-style-type: none">• Stainless steel sides panels• Glass door• Joining kit• Stainless steel tubular handle 30mm• Stainless steel tubular handle 18mm• Stainless steel panels• Stainless steel portal for freestanding• Extra lenght anti-tipping kit• Anticondensation kit• Cleaning kit• FLD - Fhiaba Link Device• Front ventilation kit• 90° Door stop	
Water connection / female attachment	/		
EFFICIENCY			
New Energy Label class	E		
Energy consumption (kWh/year)	128		


S750FG6

75 cm, FRIDGE, OFR Model

BUILT-IN

INTEGRATED® SERIES

CUSTOM PANELS INFORMATION

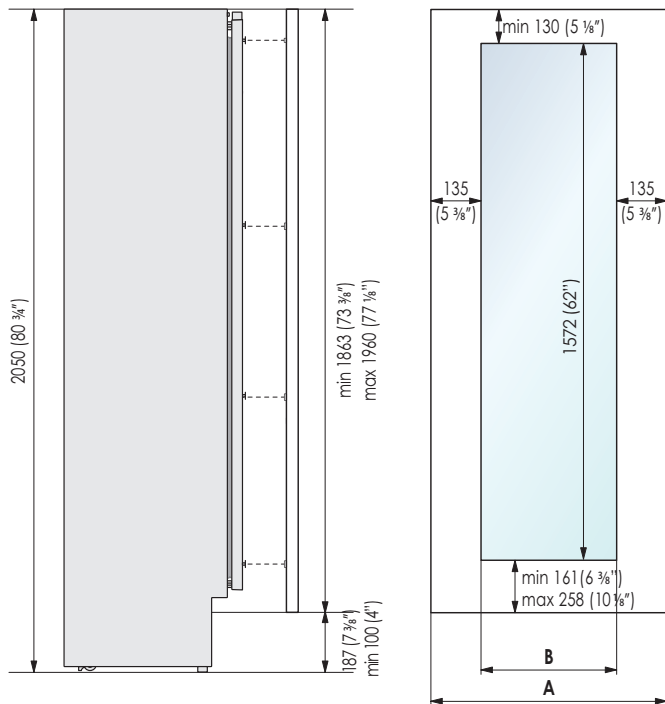

Serie	A	B
75 cm	747 (29 3/8")	477 (18 3/4")



INTEGRATED PANEL RECOMMENDATIONS

Panels with thickness ranging between 18 mm and 28 mm

Door Panels Weight Max	34 kg
Drawer Panels Weight Max	kg



For installation specifications, please consult with Fhiaba.
For optimum installation, we recommend using the actual product as the best guide.

S750FG6



75 cm, FRIDGE, OFR Model

BUILT-IN

INTEGRATED® SERIES

PRODUCT SPECIFICATIONS AND DIMENSIONS

Electrical Connection

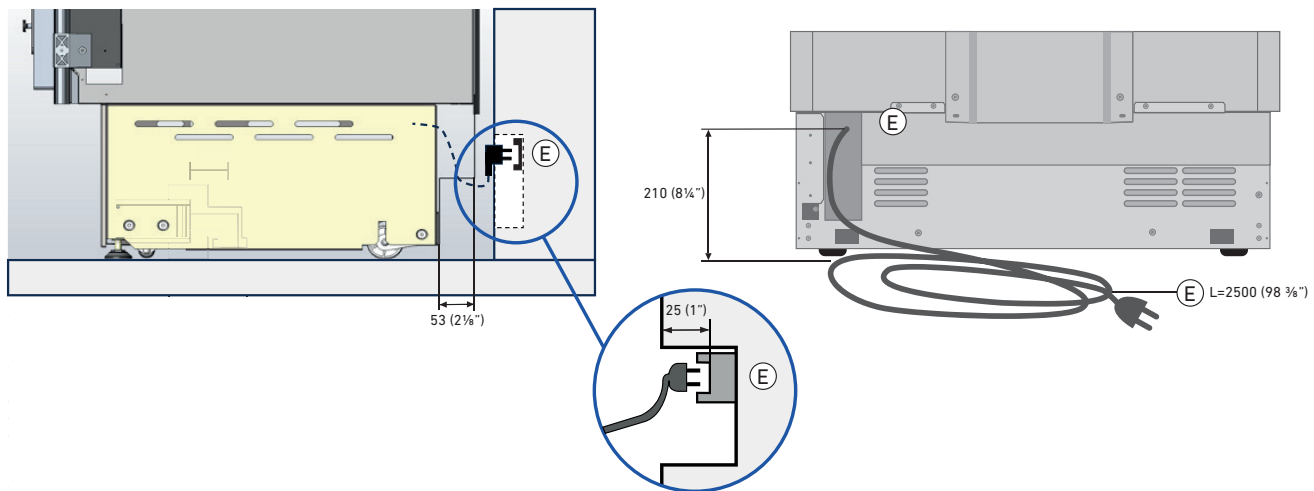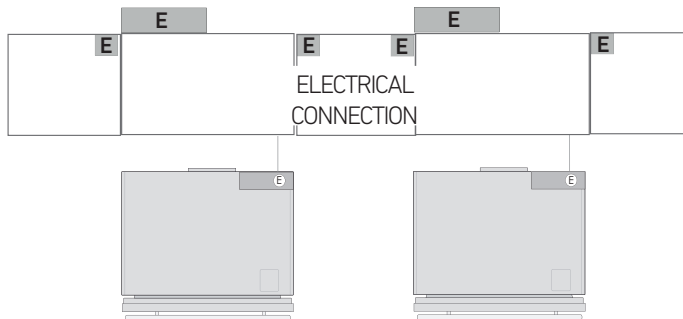

Electrical and water connections (if applicable) should be reachable without having to uninstall the appliance. If the connections must be made directly behind the appliance then it is recommended to recess those connections.

IMPORTANT: do not put the water shut-off valve behind the appliance where it will be inaccessible.



For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.