FK36BI-LS1 36", FRIDGE AND FREEZER, OT Model BUILT-IN



CLASSIC[®] SERIE



FEATURES

- Made in Italy.
- Aisi 304 stainless steel body.
- Aluminium interior finish
- Antibacterial stainless steel interior.
- Evenlift: shelves can slide up and down to be adjusted to any height in the fridge compartment.
- Provent ventilation system encourages uniform distribution of cold air in all fridge compartments by laterally circulation air.
- Equilance: dual movemenet patented hinge with self balancing movement ensures stability and resistance.
- Optiview: multi LED light array (top and side interior) provides brilliant illumination to the entire interior.
- Soft close door and drawers in all compartments
- Smart touch TFT display
- Acoustic and visual signals
- Total no frost 100% automatic system
- Variable speed compressors mainteins precision temperature control with low vibration.
- Sabbath mode
- Front and rear adjustable feet up to 25 mm.
- Two indipendent climatic zone.
- Tempered glass shelves with aluminium profiles.
- Crisper drawers for multi use preservazion solution. Antibacterial stainless steel interior & rounded courners promoting hygiene and easy cleaning.
- Deep capacity within a standard depth is achieved by a side mounted evaporators, wich leaves grater interior space.
- Full range of models and configurations (18", 24", 30" and 36"). Can easily be combined and configured with other Fhiaba fridge, freezer, wine cellar models to fit your kitchen needs.




GENERAL PROPERTIES			
Reversible door	NO		
Equilance	YES		
SoftClosing Runner	YES		
Low vibration	YES		
Optieview (LED light spots)	YES		
Shelves	2		
Slide-out shelves	NO		
Type of shelves	GLASS		
Door Bins	3		
Fridge drawers type	LOW TEMP		
Fresco/LowTemp Drawers	2		
Bottom drawers	1		
Full Extension shelves 90° door opening	YES		
Full Extension drawers 90° door opening	YES		
Defrost Process	AUTOMATIC		
Ice maker with water filter	YES		
Door Open Alarms	YES		
Humidity control	NO		
Active carbon filter	NO		
Air filter control	NO		
Shopping Fridge	YES		
Shopping Freezer	YES		
Power Failure Function	YES		

FK36BI-LS1

36", FRIDGE AND FREEZER, OT Model BUILT-IN CLASSIC[®] SERIE **PRODUCT DETAIL**





[.]1D | 1BD | 2M

D = door BD = drawer M = separate microclimates

DIMENSIONS & WEIGHT		
Height of the product (closed weels) (in)	83" 1/2 (2120 mm)	
Adjustable feet height (in)	1" (25 mm)	
Width of the product (in)	36" (913 mm)	
Depth of Product without handle (in)	25" (635 mm)	
Wall cavity height (in)	84" (2134 mm)	
Wall cavity width (in)	36" (914 mm)	
Wall cavity depth (in)	min 25" (635 mm) + panel thickness for flush install	
Net Weight (lbs)	472 (214 kg)	
Gross Weight (lbs)	518 (235 kg)	
TEMPERATURE RANGES		
Climatic compartments	2	
Compartment 1 / Upper temperature (°F)	from 1 to 7	
Compartment 2 / Middle temperature (°F)		
Low temp zone	YES	
Compartment 3 / Low temperature (°F)	from -13 to -23	
Dual zone	NO	

CAPACITY	
Capacity (cbf)	18.7
Compartment 1 / Upper wine cellar capacity (bottles)	
Compartment 2 / Lower wine cellar capacity (bottles)	
Compartment 3 / Bottom wine cellar capacity (bottles)	-

TECHNICAL DETAILS

Absorbed power (W)	
Total absorbed current (A)	2.05
Voltage (V)	115
Frequency (Hz)	60
Power Cord Length (in)	78" 3/4
Plug Туре	3-prong (15 Amp)
Climatic class	SN/T
Refrigerant (gas)	R134a
Water connection / female attachment	3/4" NPT (1/4" elbow

EFFICIENCY

Estimated Yearly Electricity Use

580

FK36BI-LS1

36", FRIDGE AND FREEZER, OT Model BUILT-IN




CLASSIC[®] SERIE


PRODUCT SPECIFICATIONS AND DIMENSIONS

FRONT VIEW

SIDE VIEW

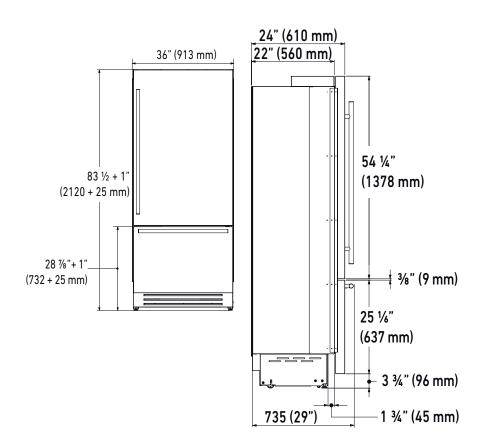

TOP VIEWS,

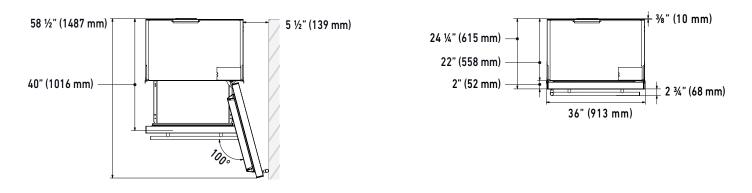






Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment.

FK36BI-LS1

36", FRIDGE AND FREEZER, OT Model


BUILT-IN

CLASSIC® SERIE NICHE SPECIFICATIONS AND DIMENSIONS

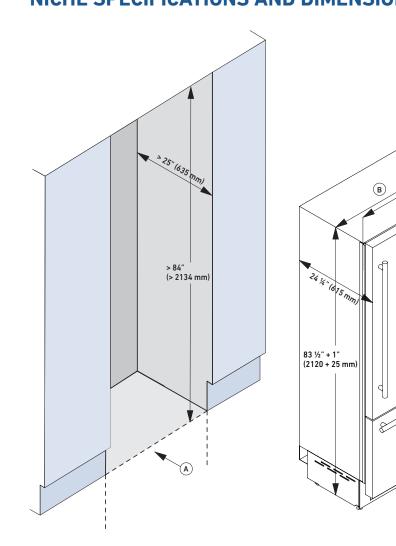

TECHNICAL DATA	
Niche Width A (mm)	36"
Unit Width B (mm)	34" 7/8
Unit Width with lateral frames ${f C}$ (mm)	36"


Electrical and Water connection

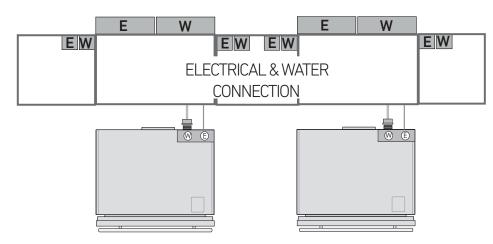



PLINTH SIZE


(c)



FK36BI-LS1 36", FRIDGE AND FREEZER, OT Model BUILT-IN CLASSIC® SERIE INSTALLATION INFORMATION



Niche dimensions for combined installation

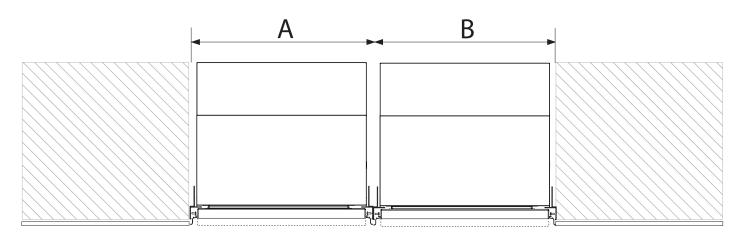

	Α				
		18"	24"	30"	36"
	18"	36"(914mm)	42"(1067mm)	48"(1220mm)	54"(1372mm)
В	24"	42"(1067mm)	48"(1220mm)	54"(1372mm)	60"(1520mm)
	30"	48"(1220mm)	54"(1372mm)	60"(1520mm)	66"(1676mm)
	36"	54"(1372mm)	60"(1524mm)	66"(1676mm)	72"(1829mm)

ACCESSORIES

- Stainless steel sides panels
- Glass door
- Ice maker with water filter
- Water filtration system
- Joining kit
- Stainless steel portal for freestanding
- Extra lenght anti-tipping kit
- Anticondensation kit
- Cleaning kit
- Water filter cartridge
- FLD Fhiaba Link Device
- Front ventilation kit
- Painting



For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.



