60 cm, FRIDGE AND FREEZER, 0T Model BUILT-IN

X-PRO® SERIE







FEATURES

- Made in Italy.
- Aisi 304 stainless steel body.
- Stainless steel interior finish
- Antibacterial stainless steel interior.
- Evenlift: shelves can slide up and down to be adjusted to any height in the fridge compartment.
- Provent ventilation system encourages uniform distribution of cold air in all fridge compartments by laterally circulation air.
- Equilance: dual movement patented hinge with self balancing movement ensures stability and resistance.
- Optiview: multi LED light array (top and side interior) provides brilliant illumination to the entire interior.
- Soft close door and drawers in all compartments
- Smart touch TFT display
- Acoustic and visual signals
- Total no frost 100% automatic system
- Variable speed compressors mainteins precision temperature control with low vibration.
- Sabbath mode
- Front and rear adjustable feet up to 25 mm.
- Two indipendent climatic zone.
- Tempered glass shelves with aluminium profiles.
- Crisper drawers for multi use preservazion solution.
 Antibacterial stainless steel interior & rounded courners promoting hygiene and easy cleaning.
- Deep capacity within a standard depth is achieved by a side mounted evaporators, wich leaves grater interior space.
- Full range of models and configurations (45, 60, 75 and 90 cm). Can easily be combined and configured with other Fhiaba fridge, freezer, wine cellar models to fit your kitchen needs.


GENERAL PROPERTIES			
Reversible door	NO		
Equilance	YES		
SoftClosing Runner	YES		
Low vibration	YES		
Optieview (LED light spots)	YES		
Shelves	3		
Slide-out shelves	NO NO		
Type of shelves	GLASS		
Door Bins	3		
Fridge drawers type	LOW TEMP		
Fresco/LowTemp Drawers	2		
Bottom drawers	1		
Full Extension shelves 90° door opening			
Full Extension drawers 90° door opening	YES		
Defrost Process	AUTOMATIC		
Ice maker with water filter	NO NO		
Door Open Alarms	YES		
Humidity control	NO NO		
Active carbon filter	NO NO		
Air filter control	NO		
Shopping Fridge	YES		
Shopping Freezer	YES		
Power Failure Function	YES		

60 cm, FRIDGE AND FREEZER, 0T Model BUILT-IN

X-PRO® SERIE

PRODUCT DETAIL







Filaba

1D | 1BD | 2M

D = door **BD** = drawer

M = separate microclimates

CAPACITY	
Volume Compartment 1 (L)	251
Volume Compartment 2 (L)	
Volume Compartment 3 (L)	77
Total Net Volume (L)	328
Total Gross Volume (L)	348
Compartment 1 / Upper wine cellar capacity (bottles)	
Compartment 2 / Lower wine cellar capacity (bottles)	
Compartment 3 / Bottom wine cellar capacity (bottles)	_

TECHNICAL DETAILS		
Absorbed power (W)		
Total absorbed current (A)	1.8	
Voltage (V)	220-240V	
Frequency (Hz)	50-60 Hz	
Power Cord Length (mm)	2	
Plug Type	Schuko 16A	
Climatic class	SN/T	
Noise level (dB)	41	
Refrigerant (gas)	R600a	
Water connection / female attachment		
	* 	

EFFICIENCY	
New Energy Label class	F
Energy consumption (kWh/year)	288
DIMENSIONS & WEIGHT	
Height of the product (closed weels) (mm)	2120
Adjustable feet height (mm)	25
Width of the product (mm)	599
Depth of Product without handle (mm)	635
Wall cavity height (mm)	2134
Wall cavity width (mm)	600
Wall cavity depth (mm)	650
Net Weight (kg)	170
Gross Weight (kg)	190
TEMPERATURE RANGES	
Climatic compartments	2
Compartment 1 / Upper temperature (°C)	from 2 to 8
Compartment 2 / Middle temperature (°C)	
Low temp zone	YES
Compartment 3 / Low temperature (°C)	from -15 to -22
Dual zone	YES


60 cm, FRIDGE AND FREEZER, 0T Model

BUILT-IN


X-PRO® SERIE

PRODUCT SPECIFICATIONS AND DIMENSIONS


FRONT VIEW SIDE VIEW

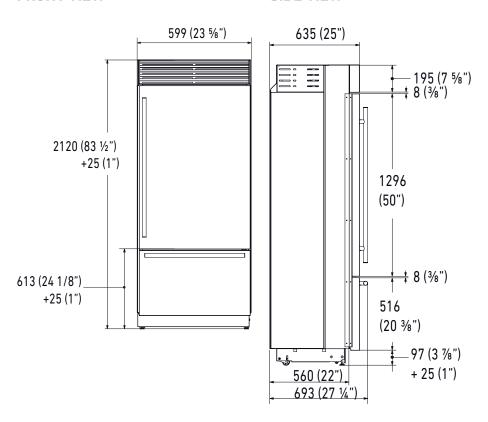


TOP VIEW, HINGE 105°



TOP VIEW, HINGE 90°



PLINTH SIZE



FARIA



For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.




Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment.


60 cm, FRIDGE AND FREEZER, 0T Model BUILT-IN

X-PRO® SERIE

NICHE SPECIFICATIONS AND DIMENSIONS




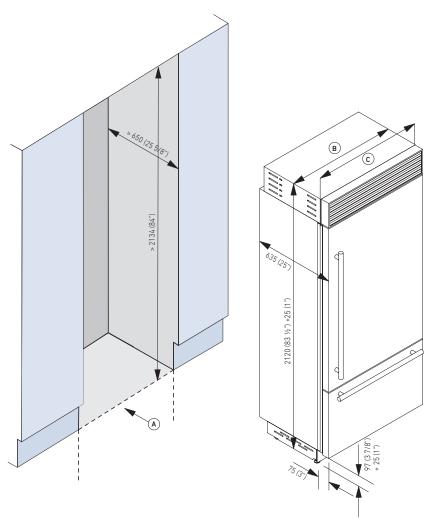



TECHNICAL DATA	
Niche Width A (mm)	600
Unit Width B (mm)	587
Unit Width with lateral frames C (mm)	599

Electrical and Water connection

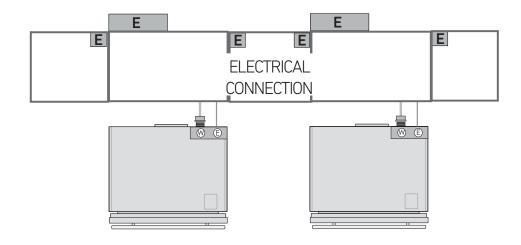


60 cm, FRIDGE AND FREEZER, 0T Model BUILT-IN

X-PRO® SERIE

INSTALLATION INFORMATION



Niche dimensions for combined installation



			А		
	unit size	45	60	75	90
	45	90 cm	105 cm	120 cm	135 cm
В	60	105 cm	120 cm	135 cm	150 cm
	75	120 cm	135 cm	150 cm	165 cm
	90	135 cm	150 cm	165 cm	180 cm

ACCESSORIES

- Stainless steel sides panels
- Joining kit
- X-Pro top grille kit
- Extra lenght anti-tipping kit
- Anticondensation kit
- Cleaning kit
- FLD Fhiaba Link Device
- Painting
- 90° Door stop



For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.

