## 75 cm, FRIDGE, 0FR Model BUILT-IN

X-PRO® SERIE







#### **FEATURES**

- Made in Italy.
- Aisi 304 stainless steel body.
- Stainless steel interior finish
- Antibacterial stainless steel interior.
- Evenlift: shelves can slide up and down to be adjusted to any height in the fridge compartment.
- Provent ventilation system encourages uniform distribution of cold air in all fridge compartments by laterally circulation air.
- Equilance: dual movemenet patented hinge with self balancing movement ensures stability and resistance.
- Optiview: multi LED light array (top and side interior) provides brilliant illumination to the entire interior.
- Soft close door and drawers in all compartments
- Smart touch TFT display
- Acoustic and visual signals
- Total no frost 100% automatic system
- Isulated variavle speed compressors manteins precision temperature control with low vibration.
- Sabbath mode
- Front and rear adjustable feet up to 25 mm.
- One indipendent climatic zone.
- Tempered glass shelves with aluminium profiles.
- Crisper drawers for multi use preservazion solution.
  Antibacterial stainless steel interior & rounded courners promoting hygiene and easy cleaning.
- Deep capacity within a standard depth is achieved by a side mounted evaporators, wich leaves grater interior space.
- Full range of models and configurations (45, 60, 75 and 90 cm). Can easily be combined and configured with other Fhiaba fridge, freezer, wine cellar models to fit your kitchen needs.


GENERAL PROPERTIES		
Reversible door	NO YES YES	
Equilance		
SoftClosing Runner		
Low vibration	YES	
Optieview (LED light spots)	YES	
Shelves	3	
Slide-out shelves	NO GLASS	
Type of shelves		
Door Bins	3	
Fridge drawers type	LOW TEMP	
Fresco/LowTemp Drawers	3	
Bottom drawers		
Full Extension shelves 90° door opening		
Full Extension drawers 90° door opening	YES	
Defrost Process	AUTOMATIC	
Ice maker with water filter	NO	
Door Open Alarms	YES	
Humidity control	NO	
Active carbon filter	NO	
Air filter control	NO	
Shopping Fridge	YES	
Shopping Freezer	NO	
Power Failure Function	YES	


75 cm, FRIDGE, 0FR Model

**BUILT-IN** 

X-PRO® SERIE

## **PRODUCT DETAIL**







fridge

**D** = door

**M** = separate microclimates

Filaba

CAPACITY	
Volume Compartment 1 (L)	479
Volume Compartment 2 (L)	
Volume Compartment 3 (L)	
Total Net Volume (L)	479
Total Gross Volume (L)	489
Compartment 1 / Upper wine cellar	
capacity (bottles)	
Compartment 2 / Lower wine cellar	
capacity (bottles)	
Compartment 3 / Bottom wine cellar	
capacity (bottles)	

TECHNICAL DETAILS	
Absorbed power (W)	
Total absorbed current (A)	0.7
Voltage (V)	220-240V
Frequency (Hz)	50-60 Hz
Power Cord Length (mm)	2
Plug Type	Schuko 16A
Climatic class	SN/T
Noise level (dB)	41
Refrigerant (gas)	R600a
Water connection / female attachment	-
·	

EFFICIENCY		
New Energy Label class	F	
Energy consumption (kWh/year)	168	
DIMENSIONS & WEIGHT		
Height of the product (closed weels) (mm)	2120	
Adjustable feet height (mm)	25	
Width of the product (mm)	749	
Depth of Product without handle (mm)	640	
Wall cavity height (mm)	2134	
Wall cavity width (mm)	750	
Wall cavity depth (mm)	650	
Net Weight (kg)	162	
Gross Weight (kg)	183	
TEMPERATURE RANGES		
Climatic compartments	1	
Compartment 1 / Upper temperature (°C)	from 2 to 8	
Compartment 2 / Middle temperature (°C)		
Low temp zone	YES	
Compartment 3 / Low temperature (°C)		
Dual zone	NO	


75 cm, FRIDGE, 0FR Model

**BUILT-IN** 


X-PRO® SERIE

### PRODUCT SPECIFICATIONS AND DIMENSIONS


**FRONT VIEW** 




**SIDE VIEW** 

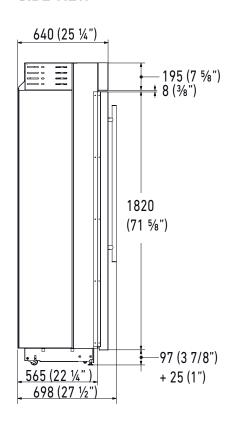

TOP VIEW, HINGE 105°



TOP VIEW, HINGE 90°



**PLINTH SIZE** 

FARIA



For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.





Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment.

75 cm, FRIDGE, 0FR Model **BUILT-IN** 


X-PRO® SERIE

## **NICHE SPECIFICATIONS AND DIMENSIONS**

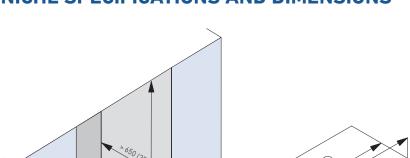




Filaba

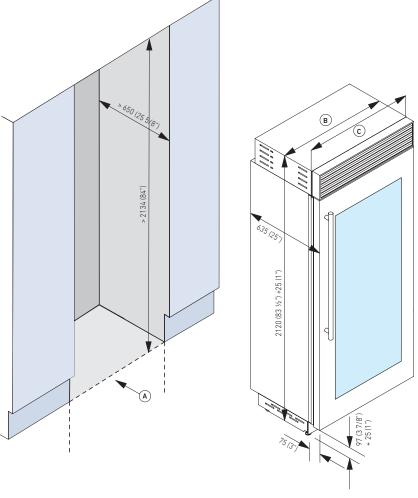

TECHNICAL DATA	
Niche Width <b>A</b> (mm)	750
Unit Width <b>B</b> (mm)	737
Unit Width with lateral frames <b>C</b> (mm)	749

#### **Electrical and Water connection**

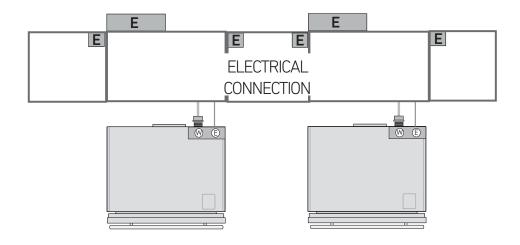


75 cm, FRIDGE, 0FR Model BUILT-IN X-PRO® SERIE





#### Niche dimensions for combined installation



			А		
	unit size	45	60	75	90
	45	90 cm	105 cm	120 cm	135 cm
В	60	105 cm	120 cm	135 cm	150 cm
	75	120 cm	135 cm	150 cm	165 cm
	90	135 cm	150 cm	165 cm	180 cm

#### **ACCESSORIES**

- Stainless steel sides panels
- Glass door
- Joining kit
- X-Pro top grille kit
- Extra lenght anti-tipping kit
- Anticondensation kit
- Cleaning kit
- FLD Fhiaba Link Device
- Painting
- 90° Door stop



For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.

